


# EC3B

S E R I E S

## 7.5 WATT DC-DC CONVERTERS

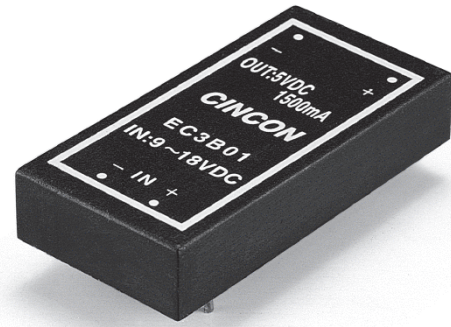

### Features

- 7.5W Isolated Output
- 2" x 1" Case
- Regulated Outputs
- Efficiency to 82%
- Pi Input Filter
- Continuous Short Circuit Protection

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		% EFF.	SIZE
				NO LOAD	FULL LOAD		
EC3B01	9-18 VDC	5 VDC	1500 mA	7.5 mA	820 mA	76	2" x 1"
EC3B02		12 VDC	625 mA	7.5 mA	780 mA	80	
EC3B03		15 VDC	500 mA	7.5 mA	780 mA	80	
EC3B04		±12 VDC	±310 mA	12 mA	775 mA	80	
EC3B05		±15 VDC	±250 mA	12 mA	780 mA	80	
EC3B06		±5 VDC	±750 mA	7.5 mA	820 mA	76	
EC3B07		3.3 VDC	1500 mA	7.5 mA	557 mA	74	
EC3B11	18-36 VDC	5 VDC	1500 mA	5 mA	400 mA	78	2" x 1"
EC3B12		12 VDC	625 mA	5 mA	380 mA	82	
EC3B13		15 VDC	500 mA	5 mA	380 mA	82	
EC3B14		±12 VDC	±310 mA	7.5 mA	385 mA	81	
EC3B15		±15 VDC	±250 mA	7.5 mA	385 mA	81	
EC3B16		±5 VDC	±750 mA	7.5 mA	400 mA	78	
EC3B17		3.3 VDC	1500 mA	5 mA	271 mA	76	
EC3B21	36-72 VDC	5 VDC	1500 mA	2 mA	200 mA	78	2" x 1"
EC3B22		12 VDC	625 mA	2 mA	192 mA	81	
EC3B23		15 VDC	500 mA	2 mA	192 mA	81	
EC3B24		±12 VDC	±310 mA	3 mA	192 mA	81	
EC3B25		±15 VDC	±250 mA	3 mA	192 mA	81	
EC3B26		±5 VDC	±750 mA	3 mA	200 mA	78	
EC3B27		3.3 VDC	1500 mA	3 mA	136 mA	76	

NOTE: 1. Nominal Input Voltage 12, 24 or 48 VDC

### Specifications

#### INPUT SPECIFICATIONS:

Input Voltage Range.....	12V.....	9-18V
	24V.....	18-36V
	48V.....	36-72V
Input Filter.....	Pi Type	


#### OUTPUT SPECIFICATIONS:

Voltage Accuracy.....	±2.0% max.
Voltage Balance (Dual).....	±1.0% max.
Temperature Coefficient.....	±0.05%/°C
Ripple and Noise, 20MHz BW.....	3.3V/5V.....100mV p-p max.
	12V/15V.....1% p-p max.
Short Circuit Protection.....	Continuous
Line Regulation, Single/Dual.....	± 0.5% max.
Load Regulation, Single.....	± 0.5% max.
	Dual..... ± 1.0% max.

#### GENERAL SPECIFICATIONS:

Efficiency.....	See Table
Isolation Voltage.....	1500 VDC min.
Isolation Resistance.....	10 <sup>9</sup> Ohms
Switching Frequency.....	100KHz, min.
Operating Ambient Temperature Range .....	-25°C to +71°C
De-rating, Above 71°C .....	Linearly to Zero power at 100°C
Case Temperature.....	100°C max
Cooling .....	Natural Convection
Storage Temperature Range.....	-40°C to + 100°C
Dimensions.....	2.00 x 1.00 x 0.40 inches (50.8 x 25.4 x 10.2mm)
Case Material.....	Black Coated Copper With Non-Conductive Base
Weight.....	.35g

### EC3B Series Derating Curve

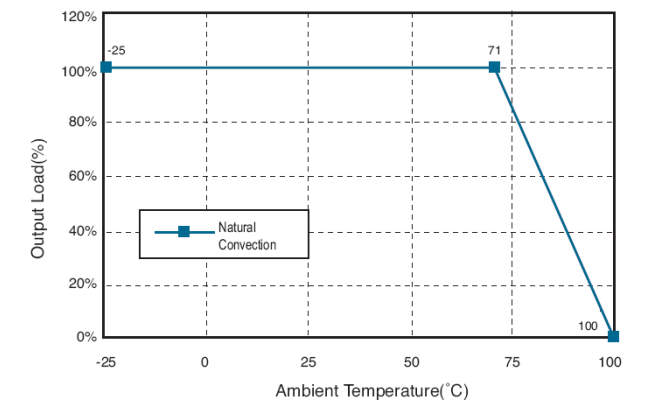

#### NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to 10% Load
3. Measured From Full Load to 1/4 Load
4. Maximum case temperature under any operating condition should not exceed 100°C.

### PIN CONNECTION

Pin	Function
1	+ Input
2	- Input
3	+ Output
4	Common/NP
5	- Output

\*NP-NO PIN

### CASE B

All Dimensions In Inches(mm)  
Tolerances Inches: x.xx= ±0.04, x.xxx= ±0.010  
Millimeters: x.x= ±1, x.xx= ±0.25

