

## DESCRIPTION

The PD110 series of DC/DC converters provide up to 110 watts of continuous output power. Available in three standard input range of 10-20VDC, 18-36VDC and 36-72VDC, they are ideal for a variety of applications including telecoms, portable equipment and vehicle mounted instrumentation. All units are available in compact "open PCB" or "enclosed" mechanical formats.

## PD110 SERIES

RoHS

## FEATURES

- Low cost
- Small size, light weight
- 100% burn-in
- Overvoltage protection
- Overcurrent protection
- Three wide input ranges:  
10-20VDC, 18-36VDC and 36-72VDC



## INPUT SPECIFICATIONS

**Input voltage :** 10 to 20VDC ( PD110 "L" series )  
18 to 36VDC ( PD110 "M" series )  
36 to 72VDC ( PD110 "H" series )

**Input current :** 15A for 12VDC  
9.4A for 24VDC  
4.7A for 48VDC

## ENVIRONMENTAL SPECIFICATIONS

**Operating temperature :** 0°C to +70°C  
**Storage temperature :** -40°C to +85°C  
**Relative humidity :** 5% to 95% non-condensing  
**Derating :** Derate from 100% at +50°C linearly to 50% at +70°C

## OUTPUT SPECIFICATIONS

**Output voltage/current :** See rating chart

**Total output power :** 110 watts maximum

**Ripple and noise :** 1% peak to peak max.

**Overvoltage protection :** set at 112-132% of its nominal output voltage

**Overcurrent protection :** All outputs protected to short circuit conditions

**Temperature coefficient :** All outputs  $\pm 0.04\%$  /°C maximum

**Transient response :** Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500us after a 25% step load change

## GENERAL SPECIFICATIONS

**Switching frequency :** 50KHz  $\pm 5$ KHz

**Efficiency :** 70% minimum at full load

**Line regulation :**  $\pm 0.5\%$  maximum at full load

**Withstand voltage :** 1000VDC from input to output

**MTBF :** 400,000 hours minimum at full load at 25°C ambient, calculated per MIL-HDBK-217F


# PD110 SERIES

## OUTPUT VOLTAGE/CURRENT RATING CHART

(3) MODEL	Output#1				Output #2				Output #3				Output #4				Maximum Output Power (2)	
	Vnom.	Imin.	I <sub>max</sub>	Tol.	Vnom.	Imin.	I <sub>max</sub>	I <sub>peak</sub>	Tol.	Vnom.	Imin.	I <sub>max</sub>	Tol.	Vnom.	Imin.	I <sub>max</sub>		Tol.
PD110-10	5V	0A	22A	3%	(N/A)					(N/A)				(N/A)				110W
PD110-12	12V	0A	9.0A	2%	(N/A)					(N/A)				(N/A)				110W
PD110-13	15V	0A	7.5A	2%	(N/A)					(N/A)				(N/A)				110W
PD110-14	24V	0A	4.5A	2%	(N/A)					(N/A)				(N/A)				110W
PD110-16	30V	0A	3.6A	2%	(N/A)					(N/A)				(N/A)				110W
PD110-23	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	(N/A)				(N/A)				110W
PD110-31	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	(N/A)				110W
PD110-32	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	(N/A)				110W
PD110-40	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	-5V	0A	1A	4%	110W
PD110-41	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	+24V	0A	1A	4%	110W
PD110-42	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	+12V	0A	1A	4%	110W
PD110-45-1	+5V	0.8A	10A	3%	+12V	0A	5A	9.0A	3%	-12V	0A	1A	4%	+24V	0A	1.5A	10%	110W
PD110-45-2	+5V	0.8A	10A	3%	+24V	0A	3A	5.0A	3%	-12V	0A	1A	4%	+12V	0A	1A	4%	110W
PD110-46	+5V	0.8A	10A	3%	+15V	0A	4A	7.5A	3%	-15V	0A	1A	4%	-5V	0A	1A	4%	110W

- NOTES:
1. Peak output current with 10% maximum duty cycle for less than 60 seconds.
  2. PD110"M" & "H" series are suitable only for 110 watts maximum at 20 CFM forced air cooling or 80 watts maximum at convection cooling. PD110"L" series are suitable only for 90 watts maximum at 20 CFM forced air cooling or 70 watts maximum at convection cooling.
  3. Suffix codes for input range, mechanical format and connector are as follows. PD110-X1X2X3X4X5, "X1X2" is the model code from the above table, "X3" is the input range (L=10-20VDC, M=18-36VDC, H=36-72VDC), "X4" is the mechanical format (A=open PCB, B=L-bracket, C=enclosed) and "X5" is the input and output connector code (Blank=Molex KK type, T=miniature terminal block), e.g. PD110-31MCT (18-36VDC input range, enclosed format and miniature terminal blocks)

## MECHANICAL SPECIFICATIONS

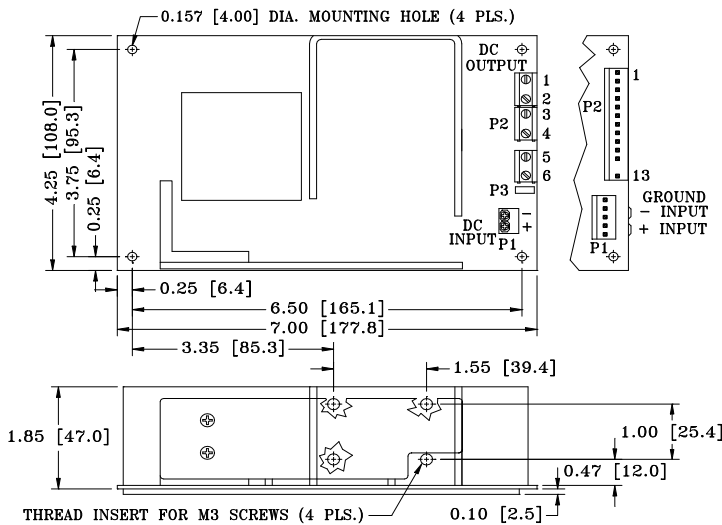

### NOTES:

1. Dimensions shown in inch [mm]
2. Tolerance 0.02 [0.5] maximum
3. Molex KK type connectors:  
Input connector mates with Molex housing 09-50-3051 and Molex 2878 series crimp terminal.  
Output connector mates with Molex housing 09-50-3131 and Molex 2878 series crimp terminal.
4. Miniature terminal blocks:  
Input terminals allow wires up to 2mm<sup>2</sup> (AWG #14).  
Output terminals allow wires up to 2mm<sup>2</sup> (AWG #14).
5. Weight: 640grams (PCB format)
6. See the mechanical details of L-bracket and enclosed formats in [page 7-2](#).

## PIN CHART

MODEL	MINI TERMINAL		MOLEX CONNECTOR		1		2		3		4		5		6	
	1	2	3	4	5	6	7	8	9	10	11	12	13			
PD110-10 PD110-13 PD110-16	PD110-12 PD110-14	OUTPUT #1	RETURN	RETURN	OUTPUT #1	N.C.	N.C.	KEY	N.C.							
PD110-23		OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	N.C.	KEY	N.C.							
PD110-31 PD110-32		OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	OUTPUT #3	KEY	N.C.							
PD110-40 PD110-42 PD110-45-2	PD110-41 PD110-45-1 PD110-46	OUTPUT #1	COMMON RETURN	COMMON RETURN	OUTPUT #2	N.C.	OUTPUT #3	KEY	OUTPUT #4							